


# Personal Safety Netting | PSN Product Specifications

Personal Safety Netting (PSN) is made from #120 industrial grade, Knotted high Tenacity Nylon with 3-1/2 inch diamond mesh for high impact shock absorption. The netting has been dyed black and treated with Granguard Fire Retardant.

## PSN Netting Specifications

<b>Style</b>	Knotted Nylon Twine, dyed black and bonded
<b>Fiber</b>	Ind. Grade High Tenacity Polyamide
<b>Cord Diameter</b>	#120 (5 mm)
<b>Mesh Size</b>	3-1/2 inch (90 mm) bar 7 inch (180 mm) stretched
<b>Mesh Break*</b>	1145 lbf (5.1 kN)
<b>Dynamic Drop**</b>	17.500 ft-lb (23730 N-m), ANSI A10.11
<b>Weight</b>	11 oz / square yard
<b>UV</b>	Extra UV Stabilizers added
<b>Colors</b>	Black

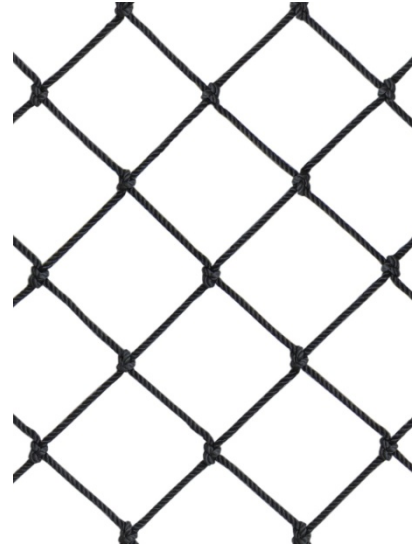

## PSN-HD Netting Specifications

<b>Style</b>	Knotted Nylon Twine, dyed black and bonded
<b>Fiber</b>	Ind. Grade High Tenacity Polyamide
<b>Cord Diameter</b>	#120 (5 mm)
<b>Mesh Size</b>	2-1/2 inch (65 mm) bar 5 inch (130 mm) stretched
<b>Mesh Break*</b>	1145 lbf (5.1 kN)
<b>Dynamic Drop**</b>	30.000 ft-lb (40680 N-m), ANSI A10.11
<b>Weight</b>	15 oz / square yard
<b>UV</b>	Extra UV Stabilizers added
<b>Colors</b>	Black

\* Mesh break refers to the strength of the individual bars of the net and does not represent the strength of the net as a whole.


\*\* ANSI A10.11 test method: 350 lb test weight dropped 34-1/2 ft into a 17x24 ft bordered net without deformation.

PSN Nets are certified to meet the requirements of ANSI A10.11, the U.S. Army Corp. of Engineers, and all applicable OSHA safety rules and regulations.

All Jammarmfg PSN netting is bordered with attachment hooks four feet on-center and staggered for attachment to cable or other nets. Provide ample deflection area under nets. Debris liner available upon request.

- Personal Safety Protection improves productivity and reduces downtime from injuries and clean up.
- Easy to install, easy to use, low maintenance, low cost.

Size		Product No	Weight - no liner		Weight - with liner	
ft	m		Lb	(kg)	Lb	(kg)
10 x 20	(3.0 x 6.1)	PSN1020	31	14	33	15
15 x 20	(4.5 x 6.1)	PSN1520	47	21	50	23
20 x 20	(6.1 x 6.1)	PSN2020	62	28	66	30

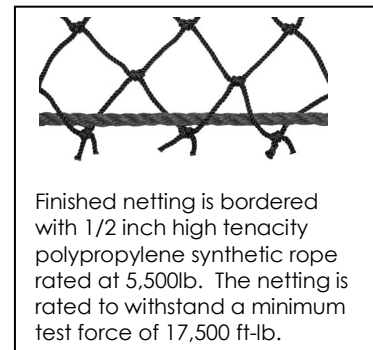

Finished netting is bordered with 1/2 inch high tenacity polypropylene synthetic rope rated at 5,500lb. The netting is rated to withstand a minimum test force of 17,500 ft-lb.

