


# M1250 Netting – HTPP Knotless | Product Specifications

M1250BK is knotless netting with a 2 inch square mesh. Knots are eliminated using a balanced knitted construction with filaments running continuously throughout the netting to enhance strength and durability.

HTPP fiber is highly resistant to abrasion, light weight, and is resistant to moisture and chemical exposure.


<b>Style</b>	Raschel Knotless Netting
<b>Fiber</b>	High Tenacity, Polypropylene (HTPP)
<b>Cord Diameter</b>	1/8 inch (3 mm)
<b>Mesh Size</b>	2 inch (50 mm)
<b>Mesh Break*</b>	280 lbf (1.25kN)
<b>Dynamic Drop**</b>	3,150 ft-lb (4,270 N-m)
<b>Weight</b>	0.03 lb/ft <sup>2</sup> (150 g/m <sup>2</sup> )
<b>Melting Point</b>	320° F (160° C)
<b>UV</b>	Extra UV Stabilizers added

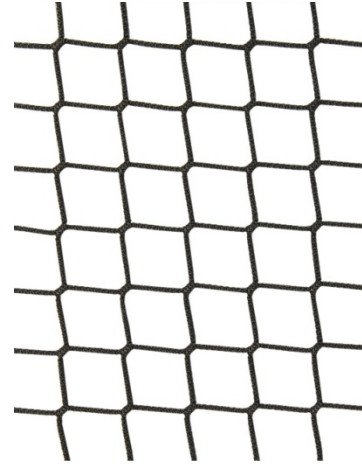


\* Mesh break refers to the strength of the individual bars of the net and does not represent the strength of the net as a whole.

\*\* ANSI A10.11 test method: 350 lb test weight dropped 34-1/2 ft into a 17x24 ft bordered net without deformation.

- Fencing & Barrier Netting
- Loft & Bed Netting
- Theme Netting
- Walking Bridges

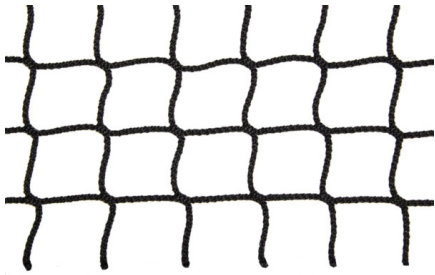

No Border | Heat Cut

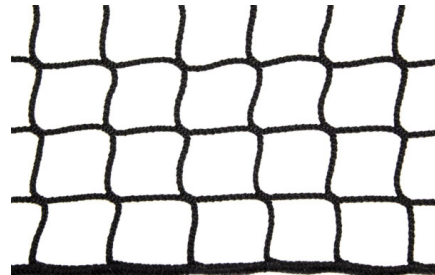

1/8in Rope Border

